

25 Years

Previous Solved Papers

Civil Services Main Examination

(2002-2026)

Civil Engineering

Paper-I

Topicwise Presentation

Also useful for
Engineering Services Main Exam
and Indian Forest Service Main Exam





MADE EASY Publications Pvt. Ltd.

Corporate Office: 44-A/4, Kalu Sarai
(Near Hauz Khas Metro Station), New Delhi-110016
Ph.: 9021300500
E-mail: infomep@madeeasy.in
Visit us at: www.madeeasypublications.org

Civil Services Main Examination Previous Years Solved Papers : Civil Engineering (Paper-I)

© Copyright, by MADE EASY Publications Pvt. Ltd.

All rights are reserved. No part of this publication may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photo-copying, recording or otherwise), without the prior written permission of the above mentioned publisher of this book.

First Edition: 2017
Second Edition: 2018
Third Edition: 2019
Fourth Edition: 2021
Fifth Edition: 2022
Sixth Edition: 2023
Seventh Edition: 2024
Eighth Edition: 2025
Ninth Edition: 2026

Tenth Edition: 2027

Preface

Civil Service is considered as the most prestigious job in India and it has become a preferred destination by all engineers. In order to reach this estimable position every aspirant has to take arduous journey of Civil Services Examination (CSE). Focused approach and strong determination are the pre-requisites for this journey. Besides this, a good book also comes in the list of essential commodity of this odyssey.



B. Singh (Ex. IES)

I feel extremely glad to launch the revised edition of such a book which will not only make CSE plain sailing, but also with 100% clarity in concepts.

MADE EASY team has prepared this book with utmost care and thorough study of all previous years papers of CSE. The book aims to provide complete solution to all previous years questions with accuracy.

On doing a detailed analysis of previous years CSE question papers, it came to light that a good percentage of questions have been asked in Engineering Services, Indian Forest Service and State Services exams. Hence, this book is a one stop shop for all CSE, ESE, IFS and other competitive exam aspirants.

I would like to acknowledge efforts of entire MADE EASY team who worked day and night to solve previous years papers in a limited time frame and I hope this book will prove to be an essential tool to succeed in competitive exams and my desire to serve student fraternity by providing best study material and quality guidance will get accomplished.

With Best Wishes

B. Singh (Ex. IES)

CMD, MADE EASY Group

Previous Years Solved Papers of
Civil Services Main Examination

Civil Engineering : Paper-I

C O N T E N T S

Sl.	TOPIC	PAGE No.
Unit-1	Engineering Mechanics 1-38	
	1. Composition, Resolution and Equilibrium of Forces..... 1	
	2. Friction 17	
	3. Kinematics of Translational and Rotational Motion 28	
	4. Work and Energy..... 32	
	5. Center of Gravity and Moment of Inertia 34	
Unit-2	Strength of Materials 39-124	
	1. Properties of Metals and Basic Concepts 39	
	2. Shear Force and Bending Moment..... 48	
	3. Bending Stresses and Shear Stresses..... 71	
	4. Torsion 88	
	5. Principal Stress & Principal Strain [Not in Syllabus] 96	
	6. Theories of Failure 98	
	7. Deflection of Beams..... 99	
	8. Columns 118	
Unit-3	Structural Analysis..... 125-240	
	1. Influence Line Diagram and Rolling Loads 125	
	2. Arches and Suspension Bridges 150	
	3. Methods of Structural Analysis 160	
	4. Trusses..... 210	
	5. Matrix Method of Structural Analysis 233	
Unit-4	Structural Steel Design..... 241-331	
	1. Connections (Bolted & Welded Eccentric Connections) 241	
	2. Compression Member..... 262	
	3. Tension Members..... 286	

4. Beams.....	298
5. Plastic Analysis	309
6. Plate Girder Load.....	324
Unit-5 Design of Concrete and Masonry Structures	332-482
1. Beams.....	332
2. Slabs.....	363
3. Columns	391
4. Footings.....	409
5. Water Tanks and Stair Cases	418
6. Retaining Wall	440
7. Prestressed Concrete	459
Unit-6 Fluid Mechanics, Open Channel Flow and Hydraulic Machines	483-658
1. Fluid Statics	483
2. Fluid Properties and Pressure Measurement.....	492
3. Kinematics of Fluid Flow	496
4. Fluid Dynamics	506
5. Vortex Flow	522
6. Pipe Flow.....	526
7. Dimensional Analysis	544
8. Laminar Flow, Turbulent Flow & Boundary Layer Theory.....	561
9. Open Channel Flow.....	595
10. Fluid Machinery	626
Unit-7 Geotechnical Engineering.....	659-800
1. Properties of Soil and Classification	659
2. Capillary, Permeability and Effective Stress.....	680
3. Compressibility and Compaction	692
4. Shear Strength of Soils.....	715
5. Seepage Analysis and Stability of Slopes.....	730
6. Earth Pressure and Retaining Wall	735
7. Stress Distribution	761
8. Shallow Foundation	764
9. Pile Foundation.....	781
10. Machine Foundation and Soil Exploration	799




1

Engineering Mechanics

1. Composition, Resolution and Equilibrium of Forces

- 1.1 A component of a machine is subjected to a system of coplanar forces shown in the figure. Neglecting friction, determine the magnitude of force P to keep the component in equilibrium. Also determine the magnitude and direction of the reaction at the hinge at B .

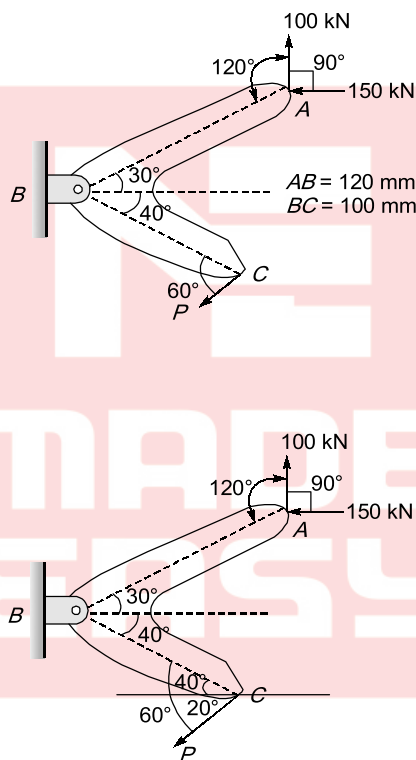

[2005 : 12 Marks]

Solution:

Let R_{Bx} and R_{By} be the reaction component at B in X and Y direction respectively.

For equilibrium $\Sigma F_x = 0$

$$-150 - P \cos 20^\circ + R_{Bx} = 0 \quad \dots(i)$$

$$\Sigma F_y = 0$$

$$100 + R_{By} - P \sin 20^\circ = 0 \quad \dots(ii)$$

$$\Sigma M_B = 0$$

$$\Rightarrow -100 \times (AB \cos 30^\circ) - 150 \times (AB \sin 30^\circ) + P \cos 20^\circ (BC \sin 40^\circ) + P \sin 20^\circ (BC \cos 40^\circ) = 0 \quad \dots(iii)$$

Given, $AB = 120 \text{ mm}$

$BC = 100 \text{ mm}$

In equation (iii), put value of AB , BC

we get, $P = 223.92 \text{ kN}$


Now, from eqn. (i) and (ii),

$$R_{Bx} = 150 + P \cos 20^\circ$$

$$= 150 + 223.92 \times \cos 20^\circ = 360.41 \text{ kN}$$

$$R_{By} = -100 + P \sin 20^\circ = -100 + 223.92 \times \sin 20^\circ = -23.41 \text{ kN}$$

Now, At hinge B,



Resultant reaction,


$$R = \sqrt{(R_{B_x})^2 + (R_{B_y})^2}$$

$$= \sqrt{(360.41)^2 + (23.41)^2} = 361.17 \text{ kN}$$

Direction of resultant force, $\tan \theta = \frac{R_{B_y}}{R_{B_x}} = \frac{23.41}{360.41} = 0.065$

$$\theta = \tan^{-1}(0.065) = 3.72^\circ \approx 3^\circ 43' 8.38'' \text{ clockwise from } x\text{-axis}$$


- 1.2 A roller of weight 20 kN rests on a smooth horizontal floor and is connected to the floor by the bar AB as shown in figure. Determine the force in the bar AB and reaction from the floor, if the roller is subjected to a horizontal force of 12 kN and inclined force of 8 kN as shown in the figure.

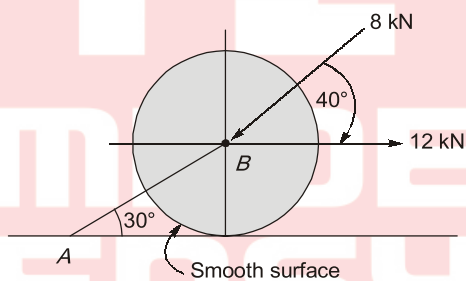

[2006 : 12 Marks]

Solution:

Given: Weight of roller = 20 kN

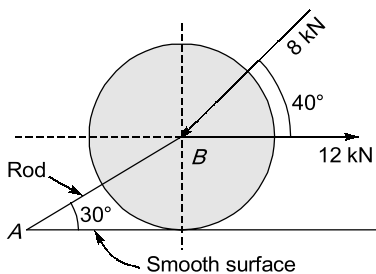

Let F_{AB} be the force in the rod AB and R be the reaction from floor.

Consider equation of roller

Resolving the forces horizontally, $\Sigma F_x = 0$


$$12 - 8 \cos 40^\circ + F_{AB} \cos 30^\circ = 0$$

$$F_{AB} = -6.78 \text{ kN}$$

Resolving the forces vertically

$$\Sigma F_y = 0$$


$$8 \sin 40^\circ + 20 - F_{AB} \sin 30^\circ = R$$

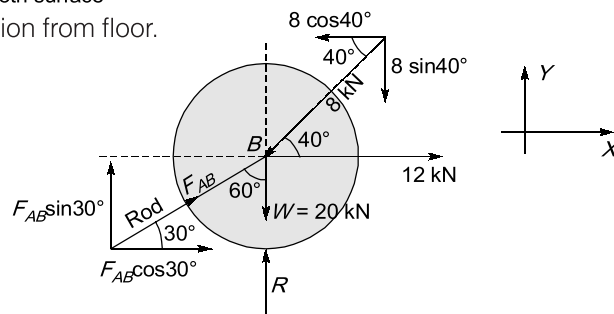

$$R = 5.14 + 20 - (-6.78) \sin 30^\circ$$

$$R = 28.53 \text{ kN}$$

Hence, force in rod AB is 6.78 kN (Tensile) and reaction from the floor is 28.53 kN. (Upwards)

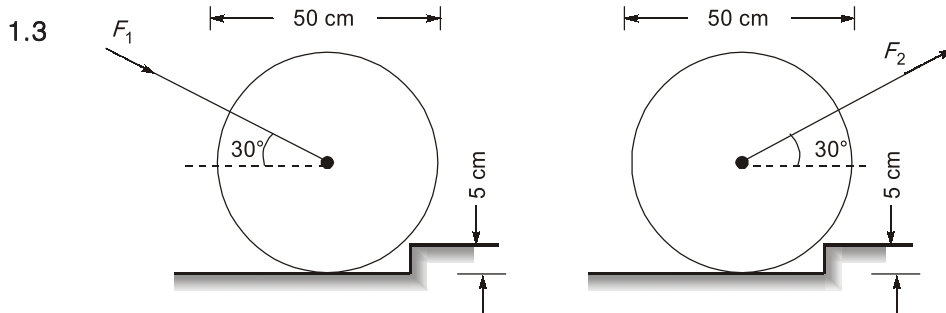



Compute the forces F_1 and F_2 required to just start a 100 kg lawn mower over a 5 cm step when
 (b) the mower is pushed and
 (c) the mower is pulled. (Above Figure)

[2007 : 20 Marks]

Solution:

Given: Mass of lawn mower = 100 kg
 Height of step = 5 cm
 Dia. of mower = 50 cm

Case-I: When the mower is pushed
 F.B.D

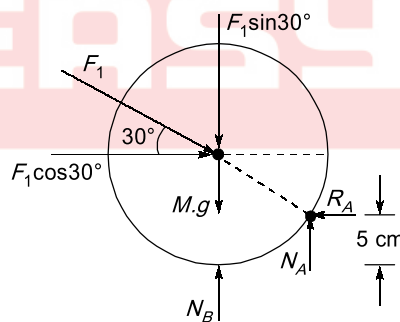

In limiting case $N_B = 0$ and $\Sigma M_A = 0$

Computing $\Sigma M_A = 0$


$$F_1 \cos 30^\circ \times (25 - 5) = (F_1 \sin 30^\circ + 100 \times 9.8) \times \sqrt{(25)^2 - (25 - 5)^2}$$

$$F_1 \times \frac{\sqrt{3}}{2} \times 20 = \left(\frac{F_1}{2} + 980 \right) \times 15$$

$\Rightarrow$

$$F_1 = 1496.86 \text{ N} = 1.496 \text{ kN}$$

Case-II: When the mower is pulled

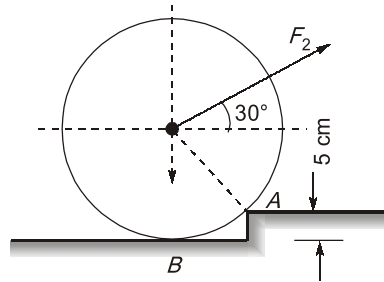


F.B.D.

In limiting case $N_B = 0$ and $\Sigma M_A = 0$
Computing $\Sigma M_A = 0$


$$F_2 \cos 30^\circ \times (25 - 5) = (mg - F_2 \sin 30^\circ) \times \sqrt{25^2 - (20)^2}$$

$$F_2 \times \frac{\sqrt{3}}{2} \times 20 = \left(980 - \frac{F_2}{2} \right) \times 15$$

$$F_2 = 592.25 \text{ N} = 0.592 \text{ kN}$$

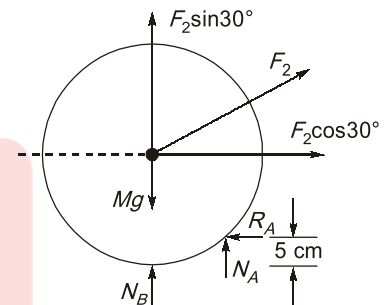

1.4




What are the orthogonal total force components in x and y directions of the force transmitted to pin A of a roof truss by the four members (above figure)

[2007 : 12 Marks]

Solution:

Here, angle between the forces acting is not given, so assuming inclination is 45° w.r.t. x and y -axis

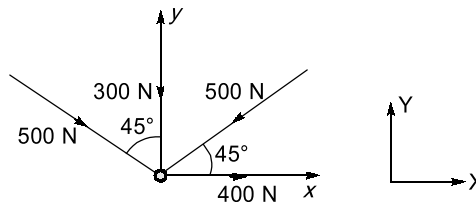

Considering the equilibrium of forces,

$$\Sigma F_x = 0$$

$$F_x = 400 - 500 \cos 45^\circ + 500 \sin 45^\circ$$

$$F_x = 400 \text{ N} (\rightarrow)$$

$$\Sigma F_y = 0$$

$$F_y = 300 + 500 \sin 45^\circ + 500 \cos 45^\circ$$


$$= 300 + 1000 \times \frac{1}{\sqrt{2}} = 1007.11 \text{ N} (\downarrow)$$

Hence, force transmitted to pin A of a roof truss

in x-direction $F_x = 400 \text{ N}(\rightarrow)$

in y-direction $F_y = 1007.11 \text{ N}(\downarrow)$


1.5

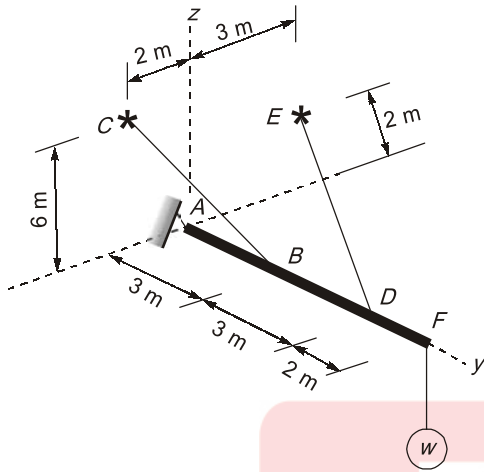

Cables BC and DE can hold a maximum tension of 280 kN before failure. Determine the maximum weight W that can be suspended from the end of the boom $ABDF$. (Above figure)

[2007 : 20 Marks]

Solution:

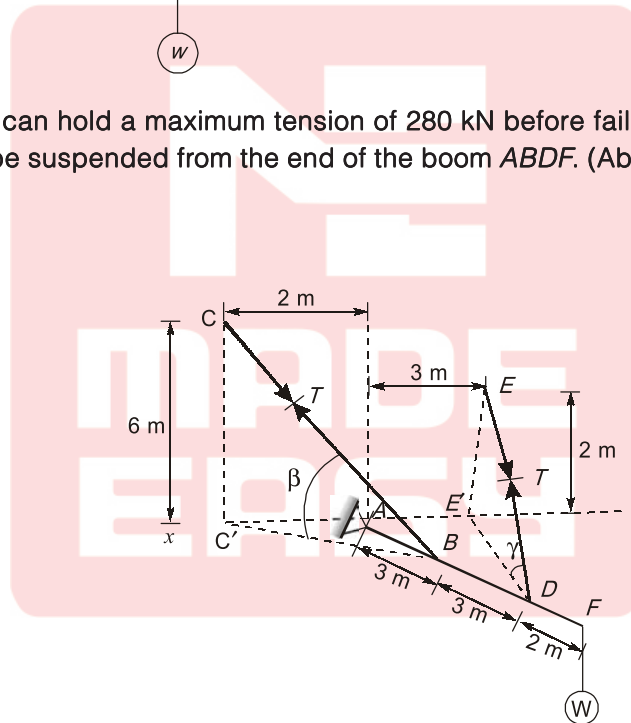

$$\text{From the given figure } BC' = \sqrt{AB^2 + (AC')^2} = \sqrt{3^2 + 2^2} = \sqrt{13}$$


$$\text{Hence, } \beta = \tan^{-1}\left(\frac{6}{\sqrt{13}}\right) \quad \left[\because \tan\beta = \left(\frac{CC'}{C'B}\right) \right]$$

$$\text{Also } DE' = \sqrt{AD^2 + (AE')^2} = \sqrt{6^2 + 3^2} = \sqrt{45}$$

$$\text{Hence, } \gamma = \tan^{-1}\left(\frac{2}{\sqrt{45}}\right) \quad \left[\because \tan\gamma = \left(\frac{EE'}{E'D}\right) \right]$$

Now let the structure is loaded with the maximum weight W then the tension in both the cable will be equal to $T = 280 \text{ kN}$

Now making the diagram in 2-D i.e. y - z plane. Force acting on the body will be

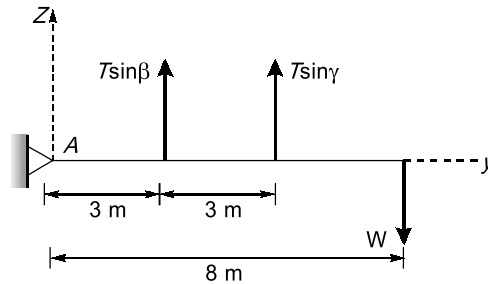

For equilibrium

⇒

$$\Sigma M_A = 0$$

$$W \times 8 = T \sin \beta \times 3 + T \sin \gamma \times 6$$

$$W \times 8 = 280 \sin \beta \times 3 + 280 \sin \gamma \times 6$$

(writing values of β and γ)

$$\tan \beta = \frac{6}{\sqrt{13}}$$

$$\sin \beta = \frac{6}{\sqrt{(36) + 13}} = \frac{6}{7}$$

$$\tan \gamma = \frac{2}{\sqrt{45}}$$


$$\sin \gamma = \frac{2}{\sqrt{45 + 4}} = \frac{2}{7}$$

$$W = 280 \times \frac{6}{7} \times 3 + 280 \times \frac{2}{7} \times 6$$

$$W = 150 \text{ kN}$$

- 1.6 A steel coil of diameter 2.5 m and weighing 700 kN has been supported on a bracket as shown. The supporting surfaces of the bracket are at right angles to each other at C. The bracket is fixed to an inclined slope and its angle of inclination with horizontal is θ . At what angle of inclination θ , will the contact force at B to one-half of the contact force at A?

Assume frictionless contact between the steel coil and the bracket. Note that only the end view is shown in the figure.

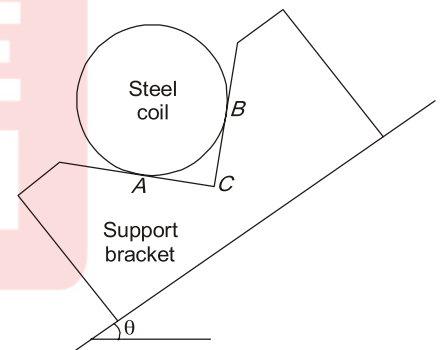

[2002 : 12 Marks]

Solution:

Given: Diameter of steel coil (D) = 2.5 m

Weight, (W) = 700 kN

By geometry,

$$\angle CDE = \angle CED = 45^\circ$$

$$\phi + \theta = 45^\circ$$

$$\angle DOG = 90 - \theta$$

$$\angle DOA = 45^\circ$$

⇒

$$\angle AOG = 90 - \theta - 45 = 45 - \theta = \phi$$


Considering the equilibrium at joint 'O'

$$\Sigma F_x = 0$$

$$W \cos \phi = N_A \quad (i)$$

$$\Sigma F_y = 0$$

$$W \sin \phi = N_B \quad (ii)$$

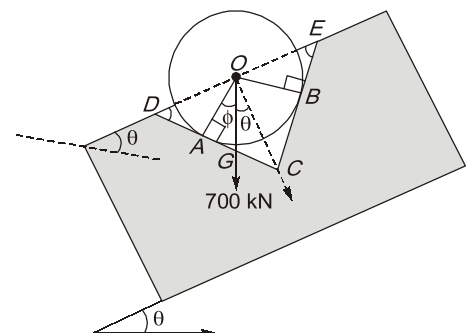

Given,


$$N_B = \frac{1}{2} N_A$$

$$700 \sin(45 - \theta) = \frac{700}{2} \cos(45 - \theta)$$


$$\Rightarrow \tan(45 - \theta) = \frac{1}{2}$$

$$\Rightarrow (45 - \theta) = 26.565^\circ$$

$$\Rightarrow \theta = 18.435^\circ$$



- 1.7 A smooth right circular cylinder of radius 0.5 m rests on a horizontal plane and is kept from rolling by an inclined string AC of length 1.0 m. A prismatic bar of length 1.5 m and weight 125 N is hinged at point A and leans against the cylinder as shown in the figure below. Find the tension S that will be induced in the string AC.

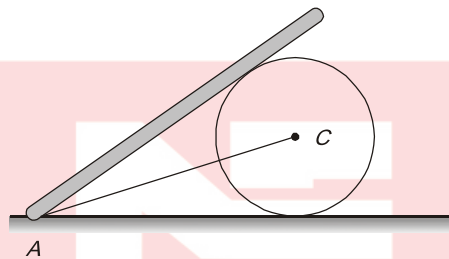




[2009 : 12 Marks]

Solution:

$$\sin \theta = \frac{0.5}{1}$$

$$\theta = 30^\circ$$

FBD of roller:

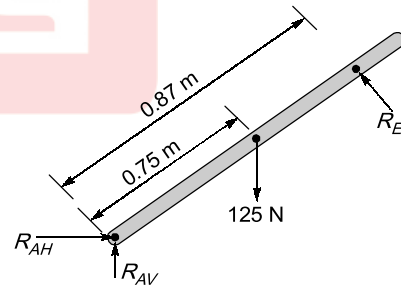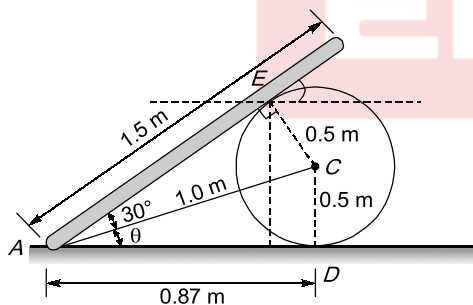

$$\text{Length of } AD = \sqrt{1^2 - 0.5^2} = 0.866 \text{ m}$$

$$AD = AE = 0.866 \text{ m} \approx 0.87 \text{ m}$$

$$\Sigma F_A = 0 \quad (i)$$


$$R_E \times 0.87 = 125 (0.75 \times \cos 60^\circ)$$

$$R_E = 54.13 \text{ N}$$

$$\Sigma F_{\text{cylinder}} = 0; -S \cos 30^\circ + R_E \cos 30^\circ = 0$$

$$S = R_E = 54.13 \text{ N}$$


- 1.8 Find the resultant of the force system acting on a Lamina of equilateral triangle of sides 200 mm. Find also its direction and position w.r.t. point A as shown in the figure, D and E are mid points of BC and AC respectively.

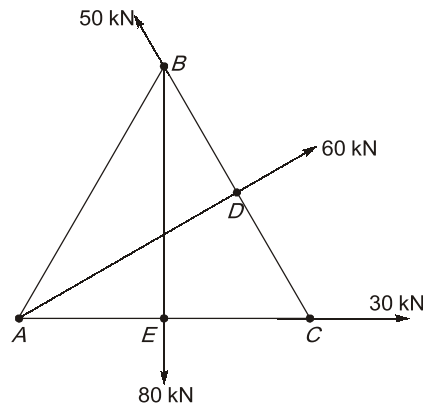

[2013 : 12 Marks]

Solution:

Given is the following force system,

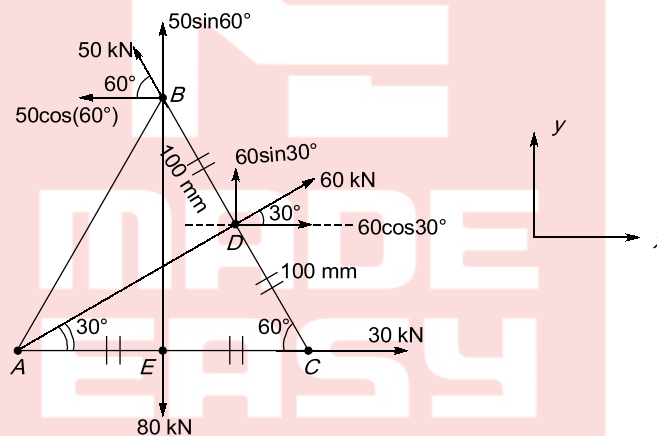

Given, triangle is equilateral with side 200 mm.

To find the resultant force:

$$\Sigma H = 30 + 60 \cos 30^\circ - 50 \cos 60^\circ = 56.96 \text{ kN } (\rightarrow)$$

$$\Sigma V = 50 \sin 60^\circ + 60 \sin 30^\circ - 80 = 6.7 \text{ kN } = 6.7 \text{ kN } (\downarrow)$$


$$\Rightarrow \text{Resultant (R)} = \sqrt{(\Sigma H)^2 + (\Sigma V)^2} = 57.35 \text{ kN}$$

$$\Rightarrow \text{Angle of resultant with horizontal} = \tan^{-1} \left(\frac{-6.7}{56.96} \right) = -6.71^\circ$$

To find distance of resultant from A

$$\Rightarrow \text{Taking moment about A } [\Sigma (M_A)] = 0$$


$$\Rightarrow R \times \bar{r} = -80 \times \frac{200}{2} + 50 \times 200 \sin 60^\circ$$

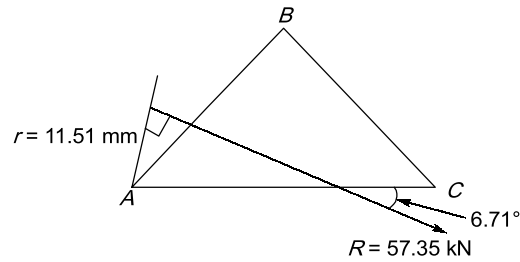

$$\bar{r} = \frac{660.25}{57.35} = 11.51 \text{ mm}$$

Hence, the final resultant value and position diagram is shown in figure.


- 1.9 Draw free body diagram (FBD) of the whole system as shown in the figure. Neglecting self weight of its parts AB, BC, AC and D, draw FBDs of individual parts also. The wheel at D is frictionless.

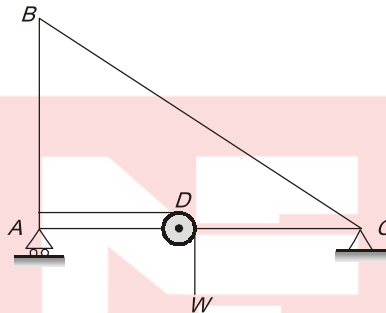


[2013 : 10 Marks]

Solution:


FBD of whole structure

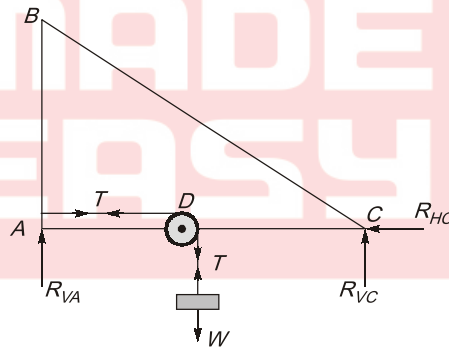


FBD for AB




FBD for BC

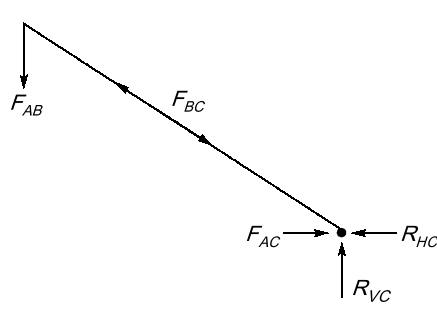


FBD for AC

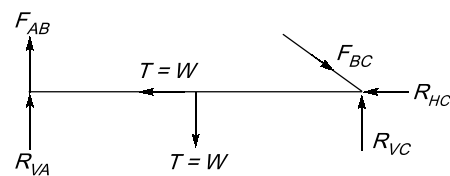

FBD for D




- 1.10 Two equal cylinders, E and F , each weighing 1000 N are placed in a box as shown in the figure. Neglecting friction between the cylinders and the box, estimate reactions at A , B and C .



[2013 : 10 Marks]

Solution:

Given two cylinders E and F each weighing 1000 N
Also, there is no friction between the cylinder and box.

FBD for cylinder F

Hence,

$$N \cos 45^\circ = R_{HC}$$

$$N \sin 45^\circ = 1000 \quad \dots(i)$$

 $\Rightarrow$

$$N = 1000\sqrt{2} \text{ N} \quad \dots(ii)$$

From (i),

$$R_{HC} = \frac{1000\sqrt{2}}{\sqrt{2}} = 1000 \text{ N}$$

Free body diagram for cylinder E

For equilibrium,



$$R_{HA} = N \cos 45^\circ = 1000\sqrt{2} \times \frac{1}{\sqrt{2}} \quad (\text{using (ii)})$$

$$= 1000 \text{ N}$$


$$R_{VB} = 1000 + N \sin 45^\circ$$

$$= 1000 + 1000 + 1000\sqrt{2} \times \frac{1}{\sqrt{2}} = 2000 \text{ N}$$

Hence,

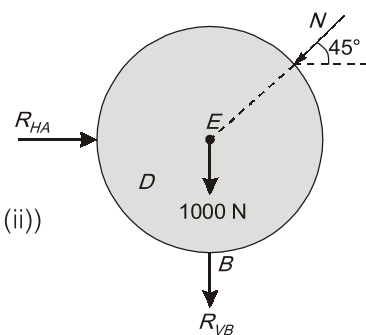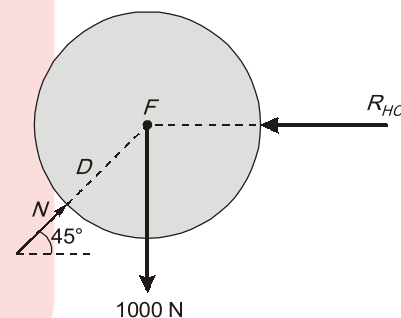Reaction at $A = R_{HA} = 1000 \text{ N}$ (Horizontal)Reaction at $B = R_{VB} = 2000 \text{ N}$ (Vertical)Reaction at $C = R_{HC} = 1000 \text{ N}$ (Horizontal)

- 1.11 Find the resultant of the force system acting on a lamina of equilateral triangle of sides 200 mm shown in figure. Also find the direction and position with respect to A.

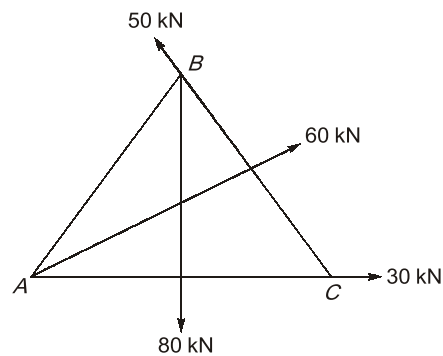


[2014 : 10 Marks]

Solution:

Considering equilibrium of forces acting on lamina

$$\begin{aligned} \Sigma F_H &= 0 \\ R_x + 30 + 60 \cos 30^\circ + 50 \cos 120^\circ &= 0 \\ \Rightarrow R_x + 56.96 &= 0 \\ \Rightarrow R_x &= -56.96 \text{ kN} \\ \Sigma F_V &= 0 \\ \text{and } R_y - 80 + 60 \sin 30^\circ + 50 \sin 120^\circ &= 0 \\ \Rightarrow R_y &= 6.698 \text{ kN} \end{aligned}$$

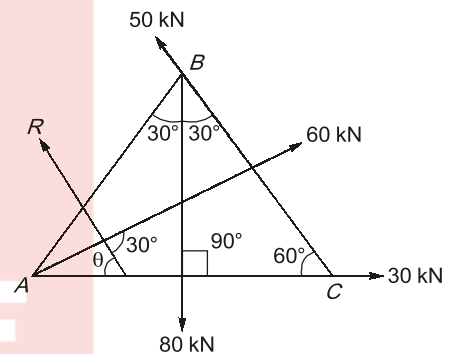

$$\Rightarrow \text{Resultant, } R = \sqrt{R_x^2 + R_y^2} = \sqrt{(56.96)^2 + (6.698)^2} = 57.35 \text{ kN}$$

Direction,

$$\tan \theta = \frac{R_y}{R_x} = \frac{6.698}{56.96} = 0.1175$$


$$\Rightarrow \theta = 6^\circ 42'$$

Let R is located x distance from A

Moment about A of all forces must be zero

$$\begin{aligned} \therefore \Sigma M_A &= 0 \\ \Rightarrow 50 \times 200 \sin 60^\circ - 80 \times 200 \cos 60^\circ + 57.35 \times x \sin 6^\circ 42' &= 0 \\ \Rightarrow 50 \times 200 \sin 60^\circ - 80 \times 200 \cos 60^\circ + 57.35 \times x \sin 6^\circ 42' &= 0 \\ \Rightarrow x &= 98.65 \text{ mm (Left of point A)} \end{aligned}$$


- 1.12 A rod AB 6 m long is held against sliding by a string AD. The rod weighs 10 kN. Determine the tension in the string AD assuming that all surfaces are smooth.

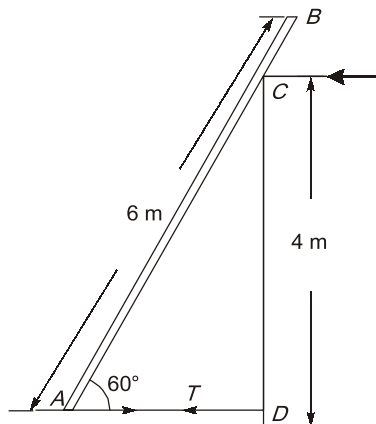

[2015 : 10 Marks]

Solution:

Considering the equilibrium of forces acting on string AD.

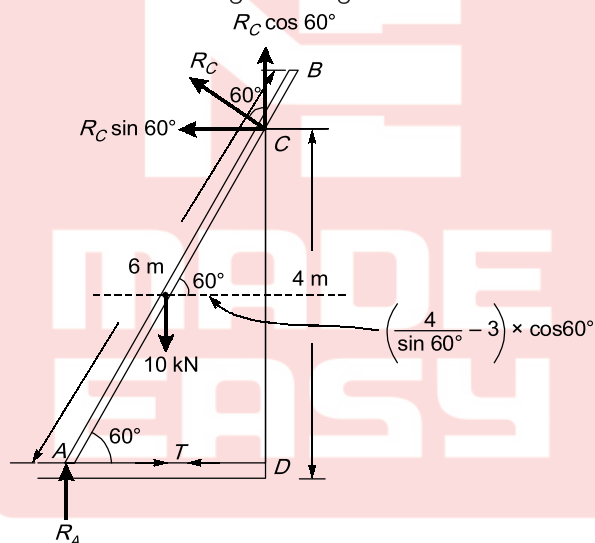

$$\Rightarrow \Sigma F_V = 0$$

$$R_A + R_C \cos 60^\circ = 10 \quad \dots(i)$$

$$\Rightarrow \Sigma F_H = 0$$

$$R_C \sin 60^\circ = T \quad \dots(ii)$$

$$\Sigma M_C = 0$$

$$\Rightarrow T \times 4 + 10 \times \left(\frac{4}{\sin 60^\circ} - 3 \right) \cos 60^\circ - R_A \times \frac{4}{\tan 60^\circ} = 0$$

$$\Rightarrow 4T + 8.09 - 2.13R_A = 0 \quad \dots(iii)$$

Using equation (i) and (ii),

$$R_A = 10 - R_C \cos 60^\circ$$

$$= 10 - \frac{T}{\sin 60^\circ} \cos 60^\circ$$


$$R_A = 10 - 0.5773T$$

Put value of R_A in equation (iii)

$$4T + 8.09 - 2.31(10 - 0.5773T) = 0$$

$$\Rightarrow T = 2.81 \text{ kN}$$

1.13 A lever is loaded as shown in the figure.

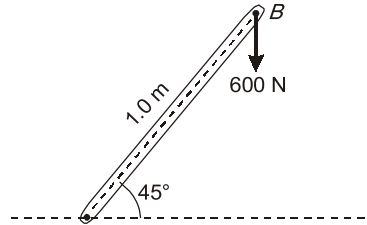

- Calculate the moment of force at Point A.
- Calculate the amount of horizontal force to be applied at B to produce the same amount of moment of force as calculated above.
- Calculate smaller amount of force to be applied at B, to produce the same amount of moment of force as calculated in part (i).
- Calculate the distance of point on lever where 1.20 kN vertical force to be applied to produce same amount of moment of force as calculated in part (i).


[2017 : 10 Marks]

Solution:

- (i) Moment of force at A,


$$M_A = 1 \times \cos 45^\circ \times 600 = 424.26 \text{ N-m}$$

- (ii) Horizontal force at B that can produce moment = 424.26 N-m




$$1 \times \sin 45^\circ \times P = 424.26$$

$$P = 600 \text{ N}$$



- (iii) Smallest force will generate the equivalent moment when it is applied perpendicular to rod.




So,

$$1 \times P = 424.26$$

$$P = 424.26 \text{ N}$$

(iv) Distance of point on lever

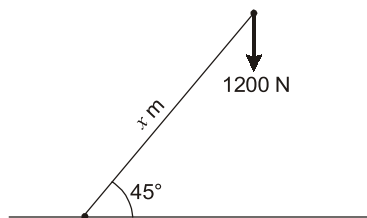


So,

$$x \times \cos 45^\circ \times 1200 = 424.26$$


$$x = 0.5 \text{ m}$$

1.14 A cantilever beam $ABCD$, as shown in the figure below, is carrying a uniformly distributed load of 10 kN/m between B and C and a clockwise moment of 50 kN-m at free end D . Draw the free body diagram for A , D and for the member BC only.

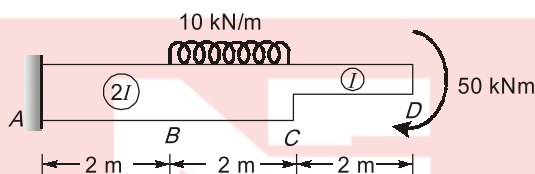

[2024 : 10 Marks]

Solution:

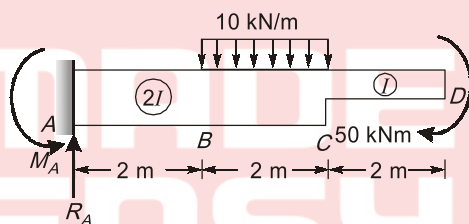

Let reactive moment induced at A is M_A and vertical reaction developed at A is R_A .



$$\Sigma \text{Moments at } A = 0$$

 $\Rightarrow$

$$M_A = 10 \times 2 \times 3 + 50 = 110 \text{ kNm (ACW)}$$

Also,

$$R_A = 10 \times 2 = 20 \text{ kN}$$

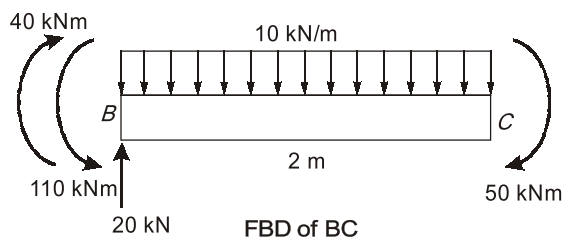FBD of joint A FBD of free end D FBD of BC